



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed:

W. Evans

Dated: 23 May 2001

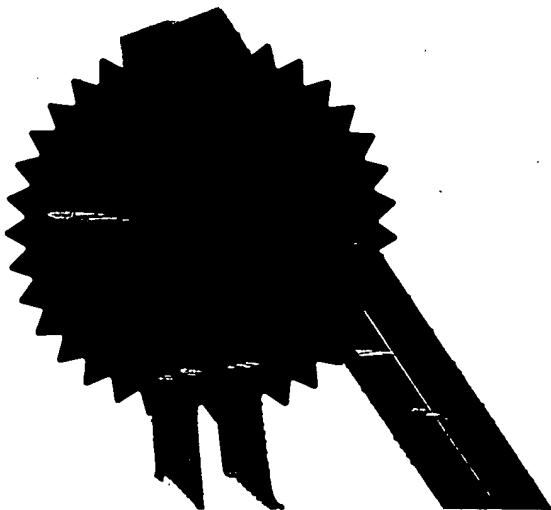

This Page Blank (uspto)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference X. CHEN 15

2. Patent application number
(The Patent Office will fill in this part)

21 AUG 2000

0020580.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Lucent Technologies Inc.
600 Mountain Avenue,
Murray Hill,
New Jersey 07974-0636
United States of America

Patents ADP number (if you know it)

07039555001

If the applicant is a corporate body, give the country/state of its incorporation

Delaware/U.S.A.

4. Title of the invention

IMPROVED METHOD OF OPERATING A MOBILE
TELECOMMUNICATIONS NETWORK

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

C.S.T. BUCKLEY
Lucent Technologies (UK) Ltd.
5 Mornington Road,
Woodford Green,
Essex IG8 OTU,
England

Patents ADP number (if you know it)

00003939003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country	Priority application number (if you know it)	Date of filing (day / month / year)
---------	---	--

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application	Date of filing (day / month / year)
-------------------------------	--

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 6
Claim(s) 2
Abstract 1
Drawing(s) 2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) 1

Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*) 1

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

11.8.2000

12. Name and daytime telephone number of person to contact in the United Kingdom

C.S.T. BUCKLEY

0208 504 2824

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

IMPROVED METHOD OF OPERATING A MOBILE TELECOMMUNICATIONS NETWORK

5

This invention relates to an improved method of operating a mobile telecommunications network, especially a method of addressing packets destined for a mobile terminal in a foreign network.

In third generation telecommunications networks such as GPRS (General Packet Radio Service) and EDGE (Enhanced Data-rate for GSM Evolution), when a mobile terminal moves into a foreign network, network connectivity is optionally maintained by the use of Mobile Internet Protocol (Mobile IP). In the home network, a Home Agent (HA) is set up which maintains the location information of the mobile by use of Binding Updates, i.e., registration of information sent to the HA by the mobile node.

Mobile IP has two working modes. The first is illustrated in Figure 1; a mobile terminal is currently attached as Mobile Node (MN) 14 in a network different from its home network. The MN 14 is communicating with a Correspondent Node (CN) 12. A Home Agent 16 is set up in the home network by the CN 12, and a Foreign Agent (FA) 18 is set up in the foreign network. The FA 18 allocates a unique IP address for the visiting mobile, a Care of Address (COA) and this address is sent to the HA 16 in a Binding Update.

Packets for the mobile are encapsulated by the HA 16 and tunnelled along tunnel 20 to the FA 18 for transmission to MN 14. In such encapsulation, an extra IP header is added to each packet, including the COA of the MN 14. This is known as FA-COA working mode.

In the second working mode (not illustrated) there is no FA, the MN 14 is allocated a unique COA and encapsulated packets are tunnelled by HA 16 directly to MN 14; this is known as Colocated Care of Address mode of working (CO-COA).

In both FA-COA and CO-COA modes of working, the encapsulation generates extra headers, and possibly only small payloads can be used, which results in inefficient transmission and inefficient use of expensive system and network resources, such as radio links. Further, encapsulation hides the flow identification, and the differentiation of classes of services is thus also disabled, so that Quality of Service (QoS) provision mechanisms, such as RSVP (Resource reSerVation Protocol) Int Serve, must be

changed.

The disadvantages of encapsulation can be avoided by the use of Non Encapsulation Mobile IP technique, as set out in the applicant's co-pending patent application "Non-encapsulation Mobile IP" filed on 26 February 1999 as no.
5 99301437.2. In this technique, the current COA of the mobile node is used as the destination address, and the original source address, i.e. the CN address, is maintained. For FA-COA working, this deletes a header of length at least 20 bytes and introduces a header of only 2 bytes; for CO-COA mode of working no header is introduced. However a disadvantage is that any firewall or egress filtering in the home network may
10 reject such packets, because they have a source address different from the home network address.

It is an object of the invention to provide a method of packet addressing which overcomes the disadvantages set out above, and allows QoS to be provided.

According to the invention a method of operating a third generation mobile
15 telecommunications system in which packets are addressed to a mobile node which is currently associated with a foreign network and is communicating with a correspondent node, comprising the steps of:-

setting up a home agent in the home network and allocating a Care of Address in the foreign network for the mobile node;
20 characterized by the further steps of:-
changing the packet header so that the source address is the home agent address, the destination address is the Care of Address and the header further includes a correspondent node identifier code and a mobile node identifier code.

Usually the home agent will change the packet header.

25 The invention will now be described by way of example only with reference to Figures 2 to 4 in which:-

Figure 2a illustrates the invention operating in FA COA mode.

Figure 2b illustrates the invention operating in CO-COA operating mode;

Figure 3a illustrates a prior art packet header format;

30 Figure 3b illustrates a packet header format according to the invention; and
Figure 4 illustrates a RSVP session.

In Figure 2a, which is similar to Figure 1, a mobile terminal MN 28 has a FA 30. CN 24 has a HA 26; the figure illustrates FA COA mode. In Figure 2b, the mode is CO-COA, therefore there is no FA and packets pass directly to MN 28.

It will be seen that, in comparison with Figure 1, figures 2a and 2b do not have
5 a tunnel from HA 26 towards either FA 30 or MN 28. This is because in the inventive arrangement the packets are not encapsulated and therefore no tunnel is needed. A suitable name and acronym for the inventive technique is Non-Encapsulation Mobile Internet Protocol, NEMIP.

In Figure 3a, a packet 30 conventionally addressed to a mobile in a foreign
10 network has as source address 32 the IP address of CN 24; and as destination address 34 the home address of MN 28. Figure 3a also illustrates payload 38 and other fields 36.

In Figure 3b, in a header according to the invention, the source address 32 is the address of HA 26 and the destination address 34 is the COA of MN 28. The header
15 contains two new fields, 40, 42, containing respectively identifiers (ID) for CN 24 and MN 28.

When the network is operating in FA COA as illustrated in Figure 2a, the re-addressed packet is received by the FA 30 and the MN ID 42 is used by the FA to distinguish the different mobile nodes which are simultaneously using that FA, and the
20 packet is routed to MN 28.

When the re-addressed packet is received by FA 30 (for FA COA mode, Figure 2a) or by MN 28 (for CO-COA mode, Figure 2b), the CNID 40 is used by the FA or the MN to recover the original source address, i.e. the address of the CN 24; the FA 30 or the MN 28 then re-calculates the checksum of the packet, and delivers it to an
25 application.

Considering now the CNID 40, this unique identifier is allocated by HA 26 as soon as a packet addressed to the address of mobile is detected. The HA 26 adds an entry to an address mapping table of CNIDs and CNs, which is maintained by HA 26. Then the HA 26 sends the CNID plus the IP address of the correspondent CN to FA 30
30 (FA COA mode) or to MN 28 (CO-COA mode); either a registration reply message, or a separate CNID notification message can be used.

When the CNID is received by FA 30 or by MN 28, an entry is added to a CNID-to-CN IP address mapping table which is maintained by the FA or MN.

Information about MNs and MN IDs is similarly exchanged.

As each packet destined for MN 28 arrives at HA 26, the HA looks up the
5 CNID and CN address mapping table to find the CNID corresponding to the source address on the packet; the HA then replaces the original source address with the HA address, and the destination address with the COA of MN 28. The HA 26 adds a CNID field 40 and an MN ID field 42, adjusts the packet checksum, and dispatches the packet.

10 When the packet arrives at the FA 30 or MN 28, the CNID-to-CN table is looked up and the source address of the HA 26 is replaced by the real address of CN 24, and the destination address is replaced with the home address of the mobile. For FA COA mode, the MNID-to-MN table is looked up, as explained above. The checksum is adjusted and the packet is delivered to the MN 28 (for FA COA mode) or
15 the an application (for CO-COA mode).

The CNID and MNID formats can be very short and simple, so that the additional fields do not substantially increase the header length.

The method of packet heading according to the invention for a mobile in a foreign network retains the advantage of shorter headers, and higher payloads, in
20 common with the invention set out in the copending patent application no. 99301437.2r referred to above. Since the HA address is used as the source address, the problems during egress filtering caused by using a source address different from the home network address can be avoided. Since the destination address is changed back before a packet is delivered, an application to which the packet is delivered does not need to
25 be reconfigured, so irritating stops and re-starts of the application are avoided.

A further advantage is that only the source and destination addresses of the header are changed; all other information is unchanged, including information identifying the traffic flows from the HA 26 to the current COA of MN 28. It is therefore possible to adopt a standard QoS arrangement, such as RSVP, without
30 modification to provide QoS services to the mobile.

A QoS session will now be described using RSVP as an example.

In Figure 4, the CN 24 and HA 26 are associated with home network 50, and the MN 28 and FA 30 are associated with a foreign network 52. The RSVP session is set up as two parts, shown as Section 1 and Section 2 on the Figure; Section 1 operates between the CN 24 and the HA 26, and Section 2 operates between the HA 26 and MN 28.

Section 1 is set up as a normal RSVP session in a non-mobile environment, with a path message sent from CN 24 to HA 26; the difference in the inventive arrangement is that the return RESV message from the HA 26 to CN 24 is not initiated until Section 2 has been completed.

Section 2 covers the MN 28, and is dynamically adapted as the mobile moves from one network to another.

When HA 26 receives the PATH message from the CN 28, with the source and destination address being the CN 24 and the home address of MN 28, the HA 26 intercepts the packet and modifies or regenerates a PATH message via an RSVP proxy server by re-addressing the packet as described above. The packet passes through a number of nodes or network routers, and two routers, 54, 56, are illustrated. The PATH message is an end-to-end message. The proxy server can be attached to HA 26 or it can be a separate entity.

In foreign network 52, a foreign proxy server or its equivalent in the MN 28 or FA 30, depending on the working mode, prepares a RESV message with the COA address of MN 28 as the source address and the HA's destination address; the message contains flow identification information such as protocol ID as well as source/destination port numbers, and is dispatched. The RESV message is routed hop-by-hop through the same servers 54, 56 as the PATH message, but in the reverse direction; the source and destination addresses for each hop are changed appropriately by the routers 54, 56.

When the RESV message is received by HA 26, or an equivalent such as a home network proxy server, the RESV message is modified or re-generated with the home address of MN 28 as source address and the CN 24 as destination address; i.e. Section 2 is completed. The RESV message of Section 1 is now sent in conventional manner.

When the CN 24 or the home network proxy server receives the RESV message, a RESV confirmation message can, if requested, be sent to confirm the whole RSVP session.

When the mode of working is FA COA, to guarantee flow-specific identity, and
5 this class of service differentiation, for Section 2 of the RSVP session, Port Clash avoidance control is necessary; any known technique can be applied.

CLAIMS

- 1 A method of operating a third generation mobile telecommunications system, in which packets are addressed to a mobile node (28) which is currently
5 associated with a foreign network and is communicating with a correspondent node (24), comprising the steps of
 setting up a home agent (26) in the correspondent node (24) and allocating a Care of Address for the mobile node (22);
 characterized by the further steps of:-
10 -changing the packet header so that the source address is the home agent address, the destination address is the Care of Address, and the header further includes a correspondent node identifier code (40) and a mobile node identifier code (42).
- 2 A method according to Claim 1 in which the Care of Address is the
15 address of the mobile node (28).
- 3 A method according to Claim 1 in which the Care of Address is the address of a foreign agent (30) in the foreign network.
- 20 4 A method according to any preceding claim in which the packet header is changed by the home agent (26).
- 5 A method according to claim 4 comprising the further steps of the home agent (26) retaining a record of correspondent node (24) and correspondent node
25 identifier codes (40), and the home agent sending a copy of said record to the destination address in the Care of Address at which said information is also stored.
- 6 A method according to Claim 5 in which when a packet arrives at the destination address in the Care of Address, the destination checks the stored
30 information and replaces the correspondent node identifier code (40) in the header with the correspondent node home address.

7 A method according to any preceding claim comprising the further steps
of the home agent (26) retaining a record of the mobile node (24) and mobile node
identifier code (42) and sending a copy of said record to the Care of Address at which
5 said information is also stored.

8 A method according to Claim 7 in which, when the packets arrive at the
Care of Address, the foreign agent (30) checks the stored information and replaces the
mobile node identifier code in the header with the mobile node home address.
10

ABSTRACT

IMPROVED METHOD OF OPERATING A MOBILE TELECOMMUNICATIONS NETWORK

5

In a third generation mobile telecommunications network, when a mobile is in a foreign network, packets are addressed to it by a home agent which changes the header so that the source address is the home agent address and the destination address is the Care of Address of the mobile. Identifier codes for the mobile node and correspondent node are included in the packet header, and tables of identifier codes and the correspondent nodes are retained by the home agent and sent to a foreign agent (FA COA working) or mobile node (CO-COA working) which readdress each received packet, to a higher layer or to an application, as appropriate.

In this non-encapsulated mode of working, packets are not rejected by a firewall
15 or by egress filtering.

Figure 3

This Page Blank (uspto)

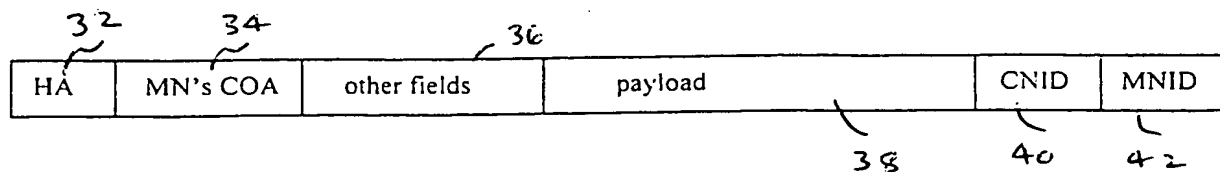
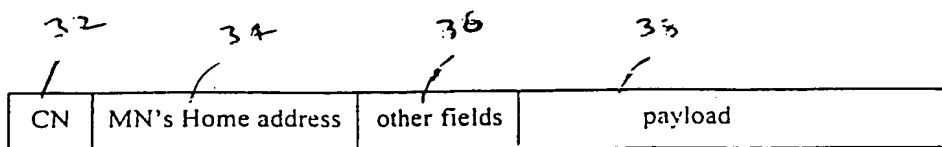
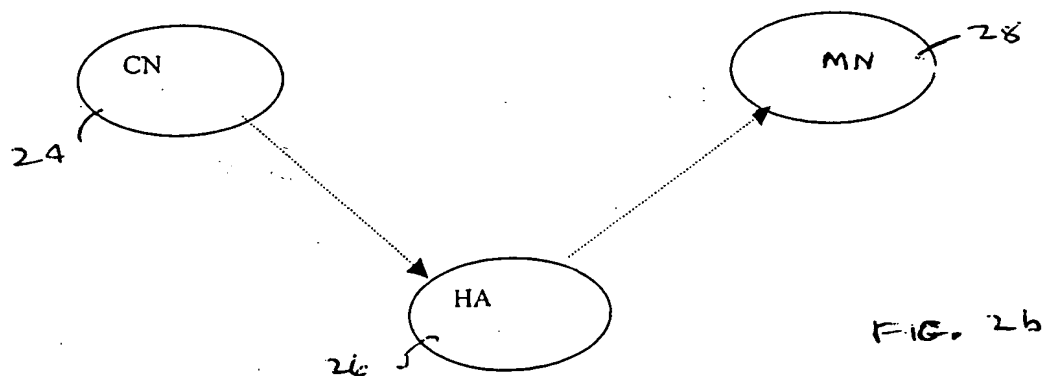
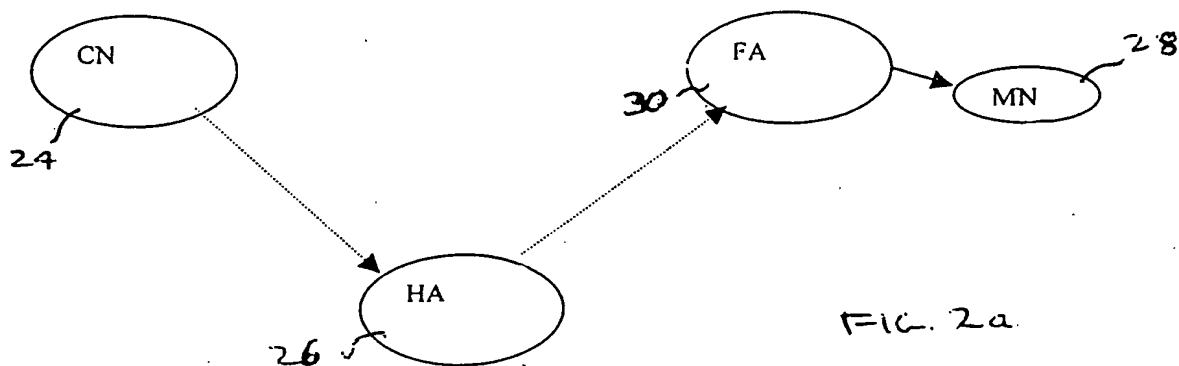
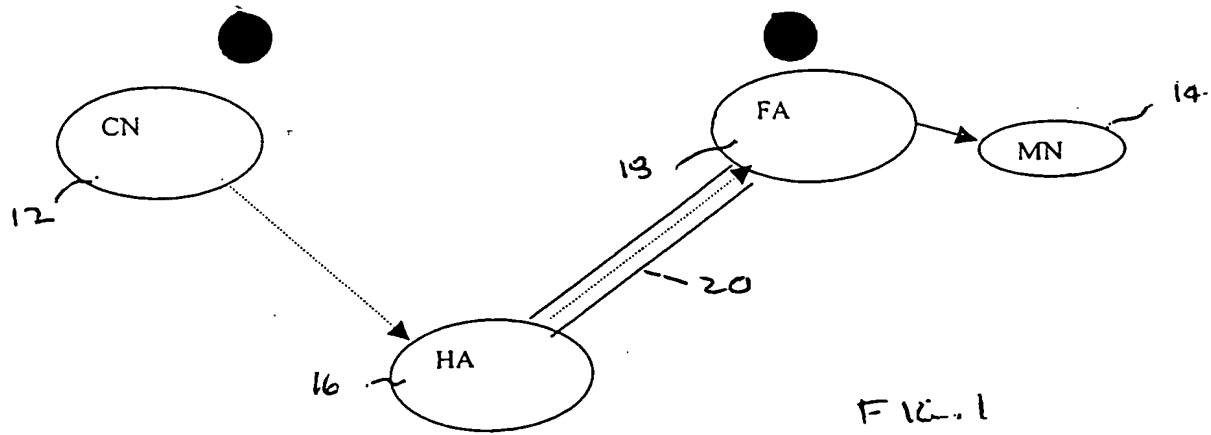


FIG. 3b

This Page Blank (uspto)

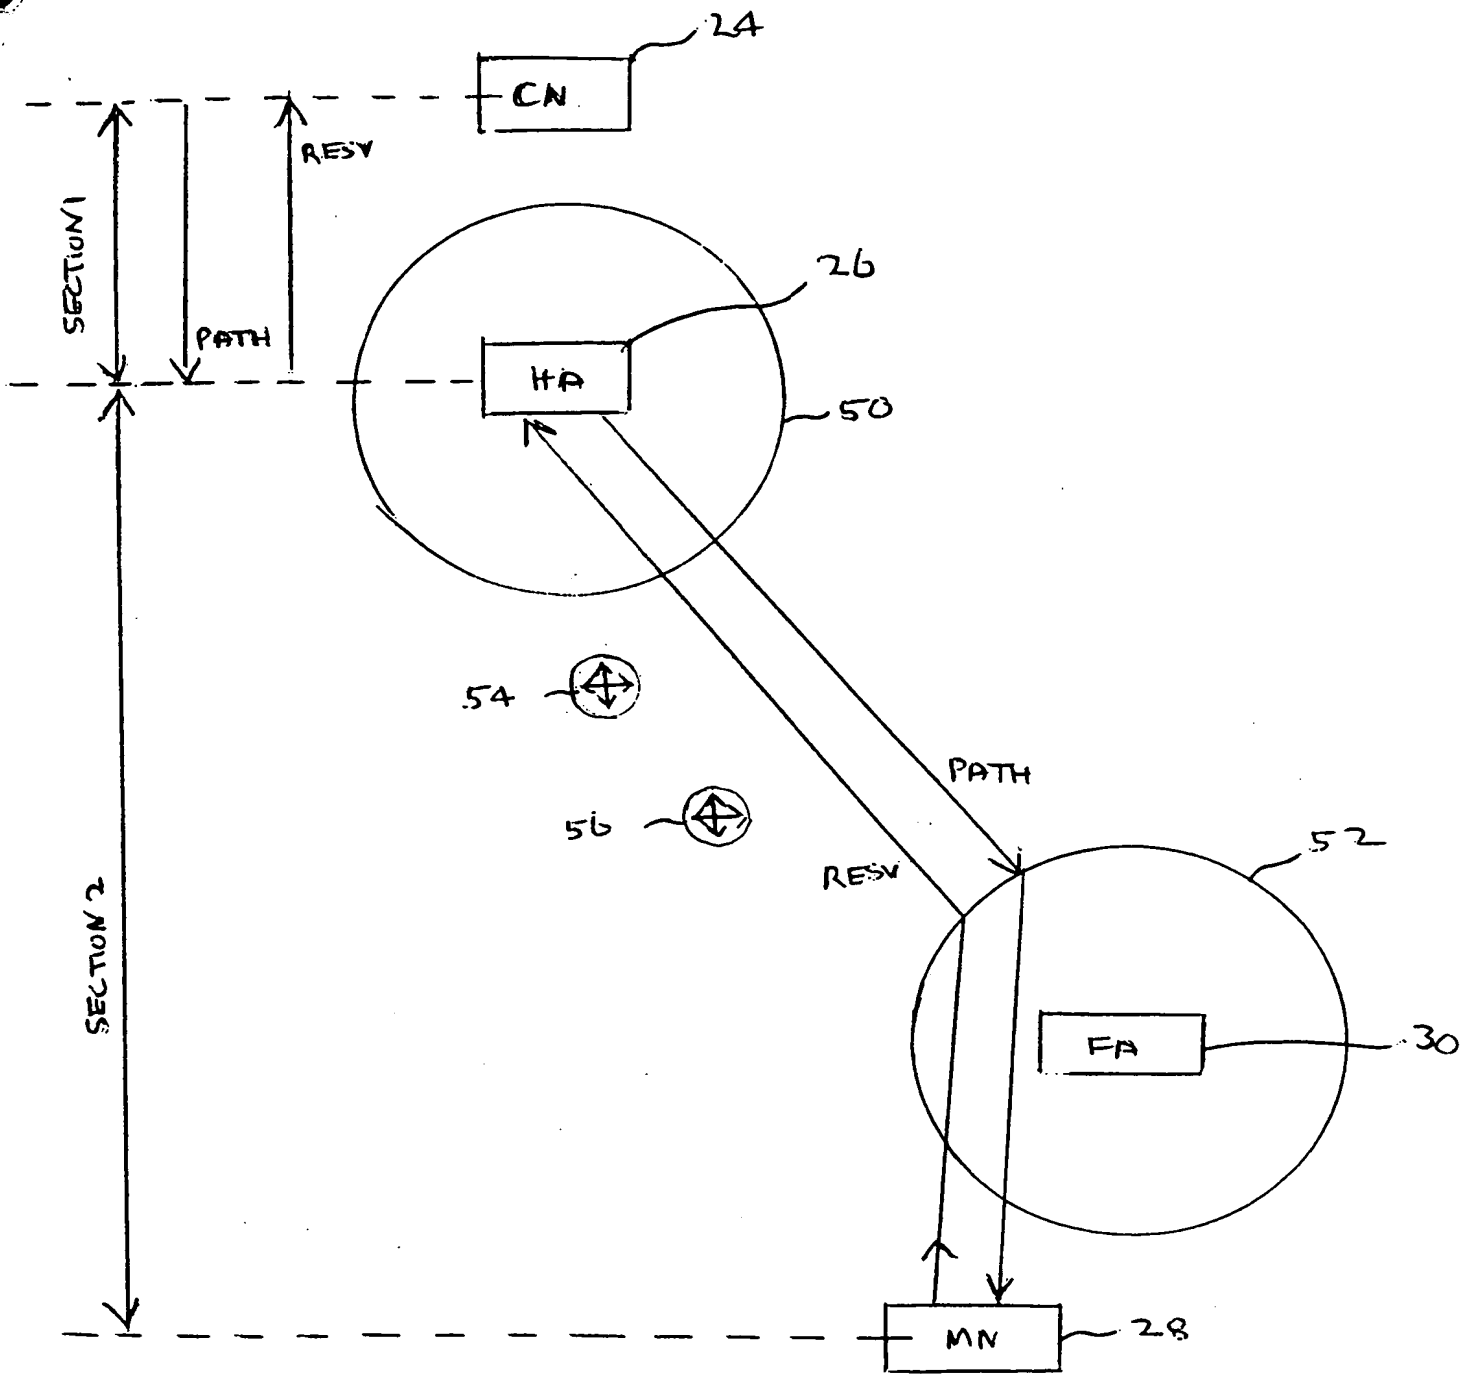


FIG. 4

This Page Blank (uspto)